




ENGINEERED POWER LP

LMRDD-DA-HT

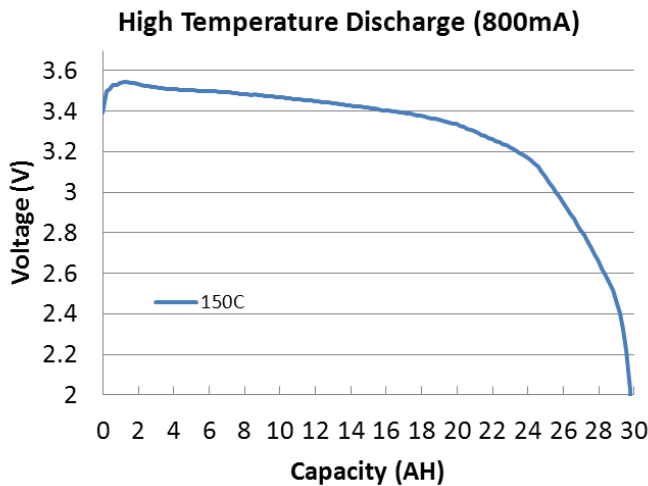

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 29.0 Ah

Rated Current: 800 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 5.0 inch (12.62cm) x 1.25 inches (3.18cm) diameter

Weight: 6.5 ounces (185 grams ±5 grams)

Shock Testing: 1000G for 0.5 ms, 10 shocks each axis at 150C

Vibration Testing: 40G RMS vibration at 150C

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)

Oil Well Instrumentation

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: February 2013