
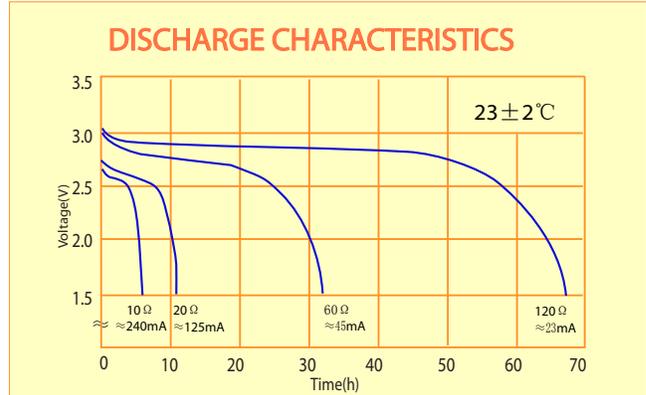



## CR123A

Manganese Dioxide  
Lithium Cylindrical Batteries

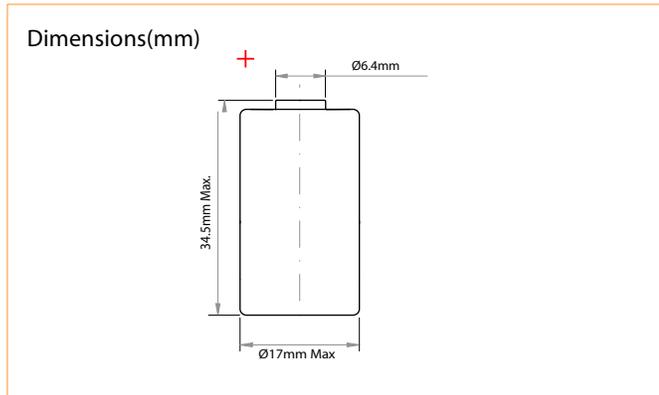

### CHARACTERISTICS (23 ± 2 °C)

Nominal capacity 10mA-2.0V	1450mAh
Nominal voltage	3.0V
Max. constant current	2000mA
Max. pulse current	3000mA
Operating temperature	-40°C ~ +85°C
Weight(g)	20.0 g

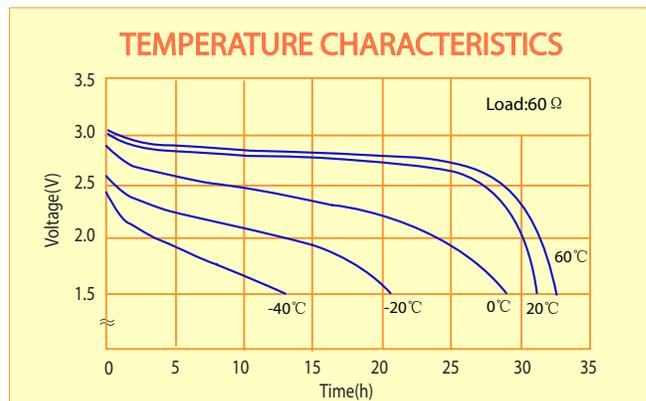

#### WARNING:

- Forbid short-circuit, charge between "+" and "-".
- Forbid over-discharge, fire,
- Finish sealing less more 5 seconds at 200°C~250°C.
- Take out the battery when discharging to cut-off voltage, and embedding it under the ground or jump in the deep water.

