


# CR14505SL Brief Datasheet

## Lithium Manganese Dioxide Battery

### 1 BASIC SPECIFICATION

(Typical values relative to cells stored for one year or less at + 30°C max.)

Nominal capacity ( at 1mA, +23 °C) * <sup>1</sup>	1500mAh
Nominal voltage	3.0V
Standard discharge current	1mA
Pulse capability: <sup>2*</sup>	Typically up to 3000mA
Maximum continuous current	2000mA
Maximum pulse current	3000mA
Operating temperature range * <sup>3</sup>	-40°C- +85 °C
Storage temperature (recommended )	+30°C Max
Weight	21g

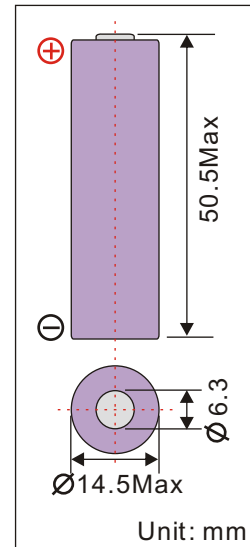



Note:

- \*1 At 1mA discharge current to 2.0V cut-off, +23 °C. The capacity restored by the cell varies according to current drain, temperature and cut-off.
- \*2 The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history.
- \*3 Operation above ambient temperature range may lead to reduced and lower voltage readings at the beginning of pulses. Consult EEMB.

### 2 MAIN FEATURES

- Best suit for high current discharge for both continuous and pulse current.
- Light Weight, High Voltage and High Energy Density.
- Excellent Stable Discharge Characteristics and Outstanding Temperature Characteristics.
- Excellent Leakage Resistance and Excellent Long-term Reliability.

### 3 ELECTRICAL CHARACTERISTICS

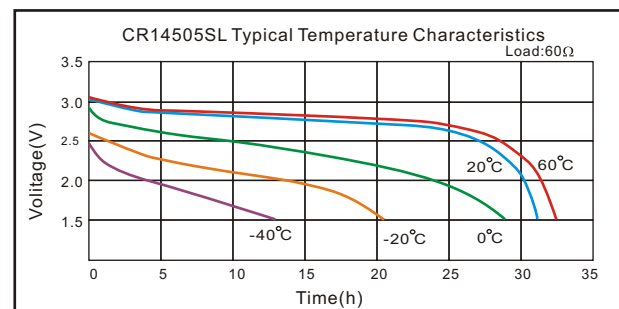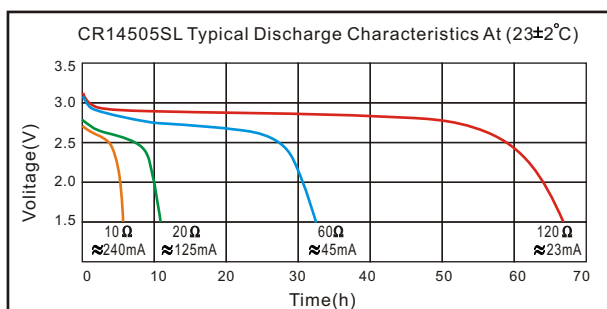

*Spiral Structure Laser-sealing*

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.