



International size reference: AA .

Electrical characteristics

(Typical values for cells stored for one year or less, at 25 °C)

● Nominal capacity	1.60Ah
(At 2.0mA, +25 °C, 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.)	
● Rated voltage	3.6V
● Maximum recommended continuous current	100mA
(Higher currents possible, consult EVE.)	
● Maximum pulse current capability	300mA
● Rated 1 sec.pulse capability(to 3V)	50mA
Pulse capability varies according to pulse characteristics (frequency duration), temperature, cell history (storage conditions prior to usage) and the application' s acceptable minimum voltage.	
● Storage	30°C max (recommended) -55°C~+180°C (possible without leakage)
● Operating temperature range	-40 C~+150 C
(Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)	
● Typical weight	19g

⚠ WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 180°C, incinerate, or expose contents to water. Do not solder directly to the cell.

ER14505S

Lithium-thionyl Chloride
(Li-SOCl₂) Battery

KEY FEATURES


- ✓ High and stable operating voltage
- ✓ High minimum voltage during pulsing
- ✓ Low self discharge rate (less than 1% after 1 year of storage at +25 °C)
- ✓ Stainless steel container
- ✓ Hermetic glass-to-metal sealing
- ✓ Non-flammable electrolyte
- ✓ Compliant with IEC 86-4 safety standard and EN 50020 intrinsic safety
- ✓ Non restricted for transport
- ⚡ Underwriters Laboratories (UL) component Recognition (File Number MH 28717)

MAIN APPLICATIONS


- ✓ Pipeline Inspection Gauges
- ✓ Oceanographic Instrumentation
- ✓ Portable Instrumentation
- ✓ Guidance and Control Systems
- ✓ Communications Equipment
- ✓ Emergency Rescue Beacons ... etc.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.


1. DISCHARGE CHARACTERISTICS @ +150°C

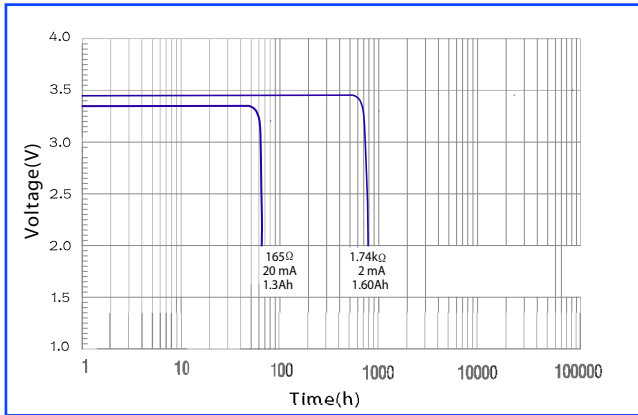

ER14505S

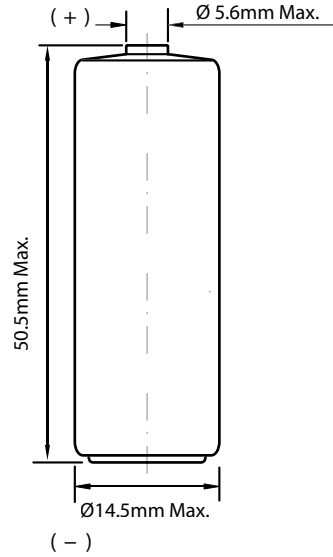


2. VOLTAGE VS. TEMPERATURE

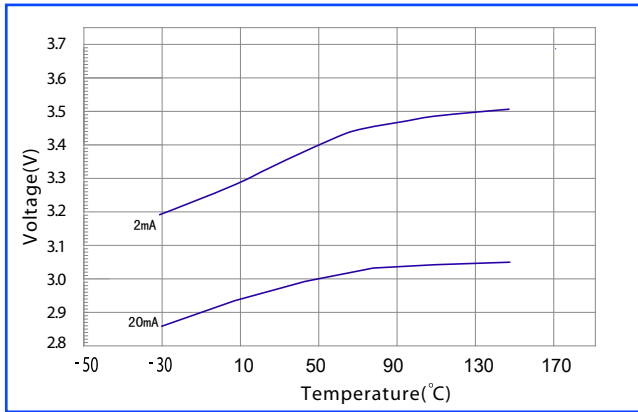

AVAILABLE TERMINATIONS:

Suffix-/S	Standard
Suffix-/P	Axial Pins
Suffix-/T	Solder Tabs
Suffix-/2PT	Radial Pins
Suffix-/3PT/3TP	Radial Pins

3. CAPACITY VS. CURRENT

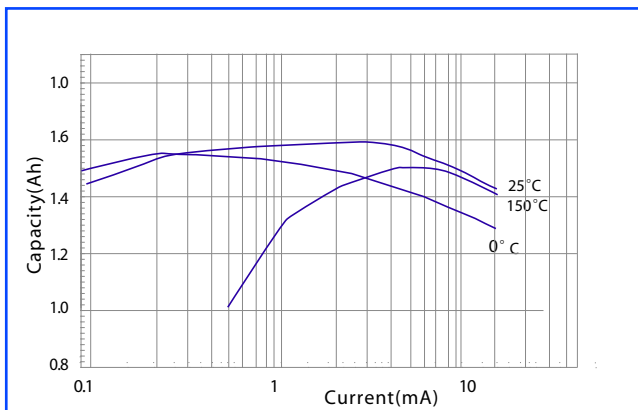

4. STORAGE CHARACTERISTICS

